


Type L mit schlanker Spitze

with Slim Point

avec pointe dégagée

MK MT CM	Ausführung Model modèle	Best. Nr. Order No. no. de com.	Abmessungen Dimensions dimensions				Werkstück Workpiece pièce max. kg	n max RPM max n max
			D	E	H	P		
2	2 ST	0218	16	29	12	5.8	100	7000
3	3 SM	0308	16	29	12	5.8	100	7000
	3 ST	0318	24	42	16	7.8	200	5800
4	4 SM	0408	24	42	16	7.8	200	5800
	4 ST	0418	30	51	19	9.8	350	4800
5	5 SM	0508	30	51	19	9.8	350	4800
	5 ST	0518	40	65	22	11.8	540	4000

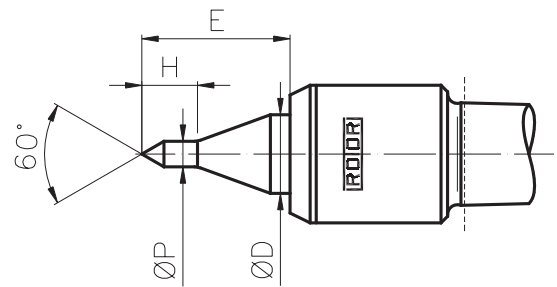

Gehäuseabmessungen siehe Typ N Seite 5

Dimensions of the body see type N on page 5

Dimensions de corps voir type N à la page 5

Type A mit Zapfen

with Shank


avec pivot

Typ A zur Aufnahme von Aufsatzkegeln

Type A to take cones

Type A pour loger des têtes coniques

MK MT CM	Ausführung Model modèle	Best. Nr. Order No. no. de com.	Zapfengröße Shank dimension dimension de pivot		Aufsatzkegel Ø Cones Ø cône-Ø
			Z	Ø	
1	1 ST	0113	Z1	Ø 12 x 15	35 / 50
2	2 SU	0223	Z2	Ø 24 x 30	50 / 75 / 100 / 150
3	3 ST	0313			
4	4 ST	0413	Z3	Ø 36 x 35	75 / 100 / 150 / 200 / 250
	3 SU	0323			
5	4 SU	0423	Z4	Ø 50 x 48	120 / 150 / 200 / 250
	5 ST	0513			
6	5 SU	0523	Z4	Ø 50 x 48	120 / 150 / 200 / 250
	6 ST	0613			
7	6 SU	0623	Z4	Ø 50 x 48	120 / 150 / 200 / 250
	7 SU	0723			
metr. 80	80 ST	8013	Z4	Ø 50 x 48	120 / 150 / 200 / 250
	80 SU	8023			
metr. 100	100 ST	1013			

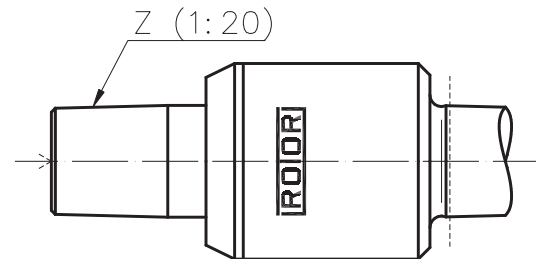

Gehäuseabmessungen siehe Typ N Seite 5

Dimensions of the body see type N on page 5

Dimensions de corps voir type N à la page 5

Aufsatzkegel zu Typ A

Cones for type A

Cône pour type A

Passend zu Suitable for convenant p.	Zapfengröße Shank dimension dimension de pivot	Best. Nr. Order No. no. de com.	Modell D		
			O	P	R
MK 1 ST	Z1 Ø 12 x 15	1033-D	35	10	30
		1053-D	50	20	35
MK 2 SU - MK 4 ST	Z2 Ø 24 x 30	2053-D	50	20	45
		2073-D	75	24	55
		2103-D	100	45	60
		2153-D	150	70	80
MK 4 SU - MK 6 ST	Z3 Ø 36 x 35	3073-D	75	30	60
		3103-D	100	45	60
		3153-D	150	70	80
		3193-D	200	110	90
		3253-D	250	160	90
MK 6 SU - MK 7 SU	Z4 Ø 50 x 45	4123-D	120	45	75
		4153-D	150	70	80
		4193-D	200	110	90
		4253-D	250	160	90

