



Flexible Luftzufuhr
Air feed tube
Tube d'amenée d'air

Type BFCA

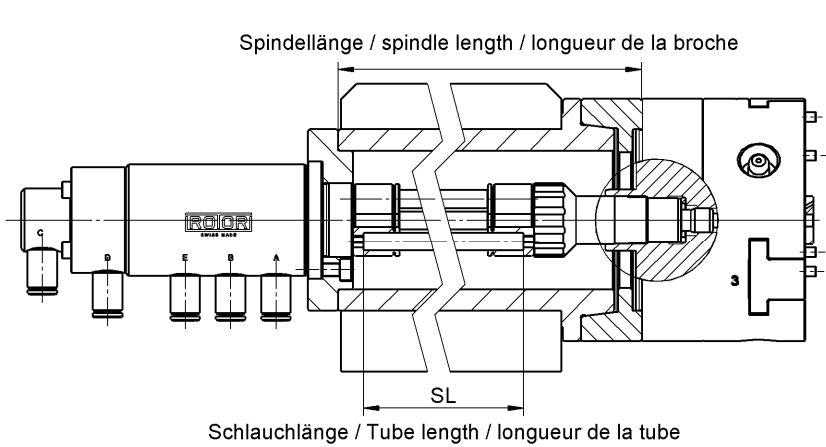

2x Doppel- Flex Schlauch ø6 Länge 1200 mm,
 benötigter Spindeldurchlass ø32 mm.
 2x Double Flex tube ø6 lengths 1200 mm,
 required spindle passage ø32 mm.
 2x Double Flex tube ø6 longueurs 1200 mm,
 passage broche requise ø32 mm.

Wichtig: Funktionskontrolle vor Kühlmittel anschliessen!


Important: function control before coolant passage connects!

Important: Contrôle de fonctionnement sur passage arrosage connexion!

Flexible Luftzufuhr mit Kühlmittel-Kanal und 3. Luftanschluss Typ BFCA
 Air feed tube with coolant passage and 3th air supply Type BFCA
 Tube d'amenée d'air avec canal arrosage e 3^{ème} port d'air Type BFCA

Best. Nr. Order No. No.de com.

LZR-BFCA

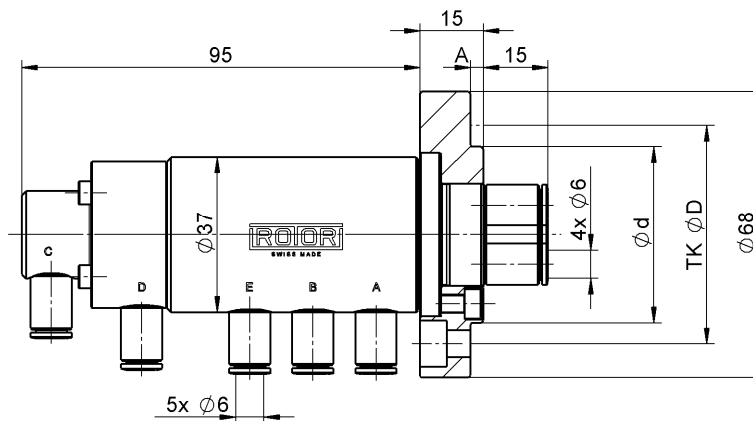



n max 6'000 min⁻¹
 RPM max 6'000 min⁻¹

- A = öffnen (schwarz), **open (black)**, ouvert (noir)
- B = schliessen (blau), **close (blue)**, fermé (bleu)
- C = Kühlmittel-Kanal (grau), **coolant passage (grey)**, canal arrosage (gris)
- D = Entlastungs/Leckagenanschluss, **release / leakage port**, Secours / port fuites
- E = 3. Luftanschluss, **3th air port**, 3^{ème} port d'air

Messing-Nippel mit Kühlmittel-Kanal und 3. Luftanschluss Typ BFCA
 Brass nipple with coolant passage and 3th air port type BFCA
 Raccord laiton avec canal arrosage e 3^{ème} port d'air type BFCA

Best. Nr. Order No. No.de com.

BFCAN

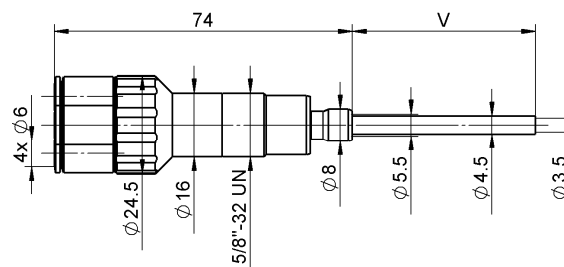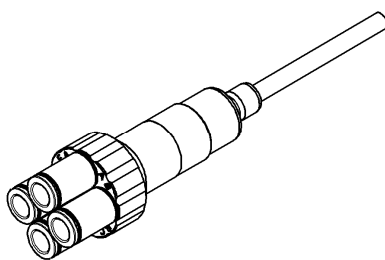

04.2019

